



# Type 722A

## BARATRON® GENERAL PURPOSE ABSOLUTE CAPACITANCE MANOMETER

Today's process environments require smaller sized, lower cost pressure measurement instruments that provide accurate, repeatable, and reliable measurements. MKS has applied its expertise in capacitance manometer design and manufacturing technology in the development of the compact Type 722 General Purpose Baratron® Capacitance Manometer. The flexible design of the Type 722 makes it an ideal solution for retrofit applications as well as new equipment designs.

Robust sensor construction provides high overpressure tolerances, reducing errors caused by occasional line pressure spikes. All sensor wetted surfaces are made from Inconel® to ensure maximum compatibility with many process gases<sup>1</sup>. Sophisticated technology and strict process controls ensure clean, smooth finishes (<10 Ra) on all wetted surfaces. Signal conditioning circuitry is CE Mark compliant, and is assembled using the latest techniques in surface mount technology. All transducers are backed with a full two-year warranty.

### Features & Benefits

#### Flexible

- Smaller, lower-cost manometer helps achieve overall system size reduction
- Signal output of 0-10 VDC or 0-5 VDC available
- Full Scale Range as low as 1 Torr
- High accuracy over a wide operating temperature range

#### Robust

- Overpressure limit of 45 psia or 2x F.S. (whichever is greater) assures no degradation in zero repeatability or performance
- Corrosion resistant — all-metal, all-welded construction exposes only Inconel and stainless steel to the media

#### Compatible

- All wetted sensor surfaces are micro-finished to <10 Ra, eliminating inclusion sites for corrosion growth
- Drop in replacement for earlier Baratron capacitance manometers
- CE Compliant — meets requirements for European Union

<sup>1</sup>Contact Applications Engineering for specific applications.



# Specifications and Ordering Information

## Configuration

### Full Scale Ranges

### Accuracy (including non-linearity, hysteresis, and non-repeatability)

### Response Time

### Temperature Coefficients

Zero

Span

### Ambient Operating Temperature

### Overpressure Limit

### Burst Pressure

### Materials Exposed to Gases

### Power

Input

Output

### Electromagnetic Compatibility

### Electrical Connectors

### Fittings

Standard

Optional

Absolute, single-ended

1 Torr through 25,000 Torr (mmHg) (0.02 psia through 500 psia)

0.5% of Reading

< 20 msec

0.008% of F.S./°C (10 Torr through 25,000 Torr); 0.020% of F.S. (1 and 2 Torr)

0.04% of Rdg./°C

0° to 50°C (32° to 122°F), 15° to 40°C (59° to 104°F) (1 and 2 Torr only)

45 psia or 2x F.S., whichever is greater

10x F.S. or 100 psi, whichever is greater

Inconel® (Optional Fittings: 316SS)

0 to 10 Volt output, +13 VDC to +32 VDC @ 10 mA max. (For drop-in replacements of 122A and B which have a ±15 VDC input, use Input/Output Ordering Code 2. See below.)

0 to 5 Volt output, +13 VDC to +32 VDC @ 10 mA max.

0 to 10 VDC into > 10K ohms load

0 to 5 VDC into > 10K ohms load

Fully CE Compliant to EMC Directive 89/336/EEC<sup>1</sup>

9-pin Type "D", 15-pin Type "D" on 4.70" (118mm) ±0.5" (12.7mm) cable, 5-pin terminal strip

1/2" tube


1/4" VCR® female, 8 VCR female, NW 16 KF<sup>2</sup>, mini-CF

<sup>1</sup> For CE Compliance, an overall metal braided shielded cable, properly grounded at both ends, is required.

<sup>2</sup> NW 16 KF fittings cannot be used on units with a pressure range of 10,000 mmHg and higher. For units with a pressure range of 5,000 mmHg, an HPS Overpressure ring must be used.

### Ordering Code Example: 722A12TCE2FJ

Type 722A	Code	Configuration	
Type 722A	722A	722A	
<b>Pressure Range Full Scale (mmHg)</b>			
1	01T	12T	
2	02T		
10	11T		
20	21T		
100	12T		
500	52T		
1,000	13T		
5,000	53T		
10,000 (must be ordered with a fitting)	14T		
25,000 (must be ordered with a fitting)	RCT		
<b>Fittings</b>			
1/4" VCR Female	QD		CE
1/2" Tube	BA		
8 VCR female	CE		
Mini-CF, rotatable	HA		
NW 16 KF	GA		
<b>Input/Output</b>			
+13 to +32 VDC/0-10 VDC	2	2	
+13 to +32 VDC/0-5 VDC	3		
<b>Accuracy</b>			
0.5% of Reading	F	F	
<b>Connectors</b>			
9-pin Type "D"	A	J	
5-pin terminal strip	J		
15-pin Type "D" on 6-inch cable	K		

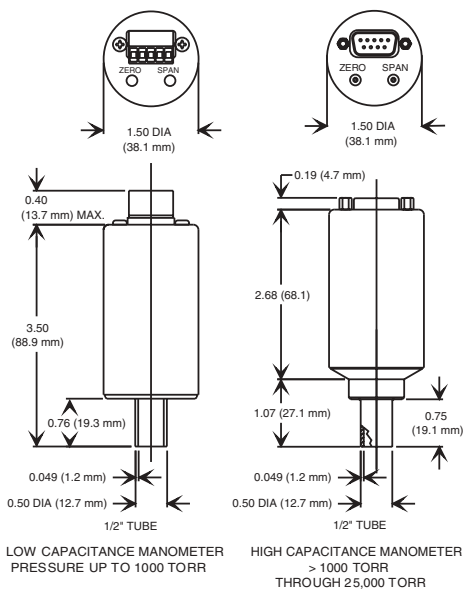

### Dimensional Drawing —

Note: Unless otherwise specified, dimensions are nominal values in inches (mm referenced).



722A - 6/05

© 2005 MKS Instruments, Inc.  
All rights reserved.

### MKS Global Headquarters

90 Industrial Way  
Wilmington, MA 01887-4610

Tel: 978.284.4000

Tel: 800.227.8766 (in U.S.A.)

Web: www.mksinst.com

Specifications are subject to change without notice.

Baratron® is a registered trademark of MKS Instruments, Inc., Wilmington, MA.

VCR® is a registered trademark of Swagelok® Co., Solon OH.

Inconel® is a registered trademark of Inco Alloys International, Inc., Huntington, WV.